



INNOV8 FLOORS

TIMBER-475

Unique Timber Solution

The INNOV8FLOORS TIMBER-475 product is manufactured using sustainable timber. It is a 2-layer engineered board with a plywood base layer and 3.6mm Oak hardwood top layer. It can be installed as a floating floor on Instalay 25HG or 30HG or alternatively can be supplied as **MAGNAFLOOR** with our unique magnetic backing to be installed direct to metal raised access flooring or floating on Ezy-Install magnetic flooring underlay.

Advantages of Timber



NATURAL PRODUCT

INNOV8FLOORS TIMBER-475 is manufactured using sustainable timber, with a plywood base layer and hardwood Oak top layer providing an extremely stable timber floor.



BRUSHED SURFACE FINISH | NUMEROUS INSTALLATION PATTERNS

The brushed surface finish provides an authentic structure and optical effect and the numerous installation patterns provide complete flexibility for unique residential and commercial projects



DURABLE NATURAL OIL COATING

A natural oiled finish provides a robust finish suitable for both residential and commercial projects.



FAST INSTALLATION

Simplifies the process of installing timber floors without the time consuming requirement for adhesive and drying times. Installation is completed quickly.



EASY TO TO REPLACE

The installation allows for easy replacement of any damaged boards without any sub-floor damage. Easy removal from leased buildings

DIMENSIONS




DIMENSIONS: 13 x 125 x 750mm
13mm Total Thickness | 3.6mm wear layer

DIMENSIONS: 13 x 125 x 1800mm
13mm Total Thickness | 3.6mm wear layer

Tongue & Groove product for installation using Instalay 25HG or 30HG Underlay

MAGNAFLOOR


For Installation direct to metal raised access floors

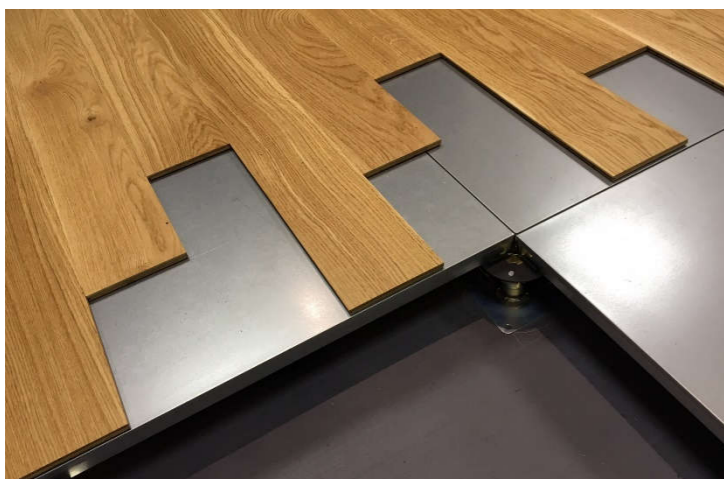


- 01 Plywood core with dimensionally stable header of birch plywood.
- 02 Unique magnetic rubber backing.
- 03 Tongue and Groove to longitudinal Sides - Groove only to headers.
- 04 Bevel Edge to longitudinal and header sides.

MAGNAFLOOR

For Installation using Ezy-Install Magnetic Flooring Underlay

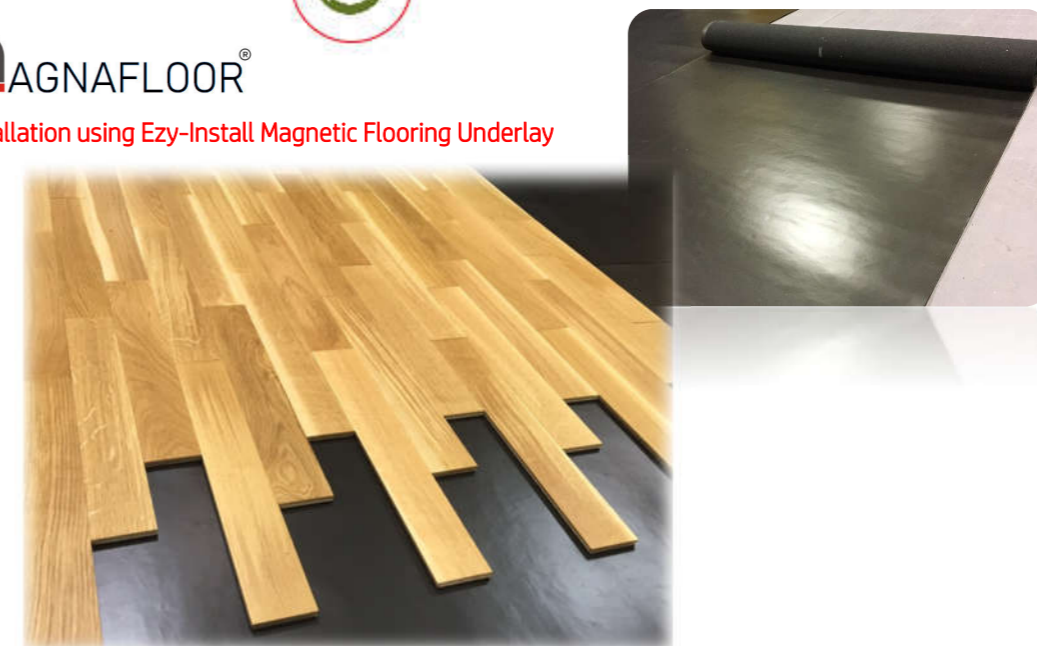

INSTALLATION PATTERNS

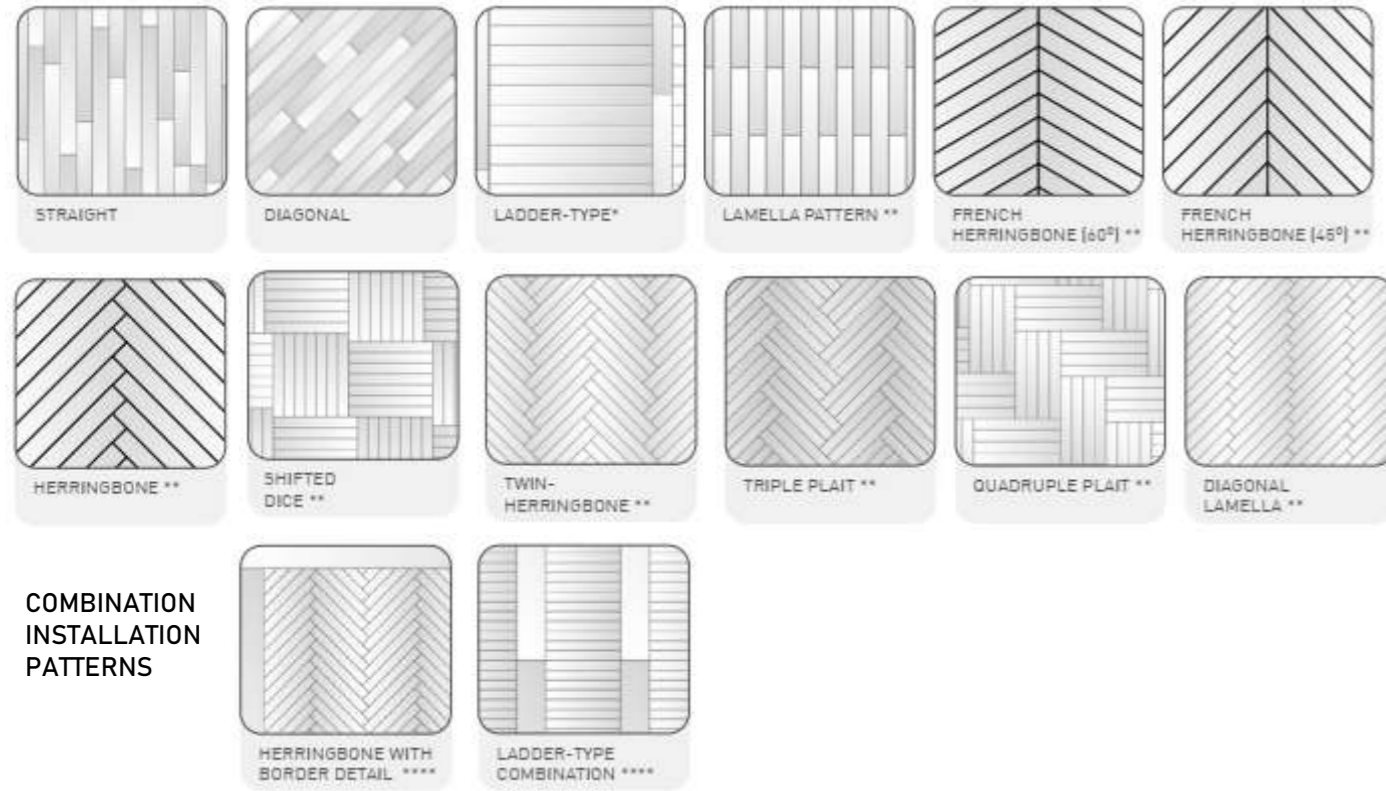

COLOUR RANGE



SURFACE FINISH - NATURAL OILED SURFACE FINISH

100% natural surface finish consisting of Sunflower, Thistle and Soya Oil as well as Candelilla Wax, sealing the open pores. Local renovation is therefore possible.



BEVELLED

Accentuates the boards appearance adding depth and presence



BRUSHED

Highlights the natural structure and grain of the timber



**INNOV
FLO8RS**

In partnership with
InstaFloor®
 SUPPORTING YOUR WORLD
 Insta House
 Ivanhoe Road
 Hogwood Business Park
 Wokingham
 RG40 4PZ
 Tel: +44(0)118 973 9560
 Email: sales@instafloor.co.uk
 Web: www.instafloor.co.uk

MAGNAFLOOR®